


GEOFF MILLER
PROPRIETARY LIMITED

Tank Liners

Easy to install, inexpensive liners
for above or below ground
concrete and steel tanks.


How to install your Geoff Miller Tank Liner.

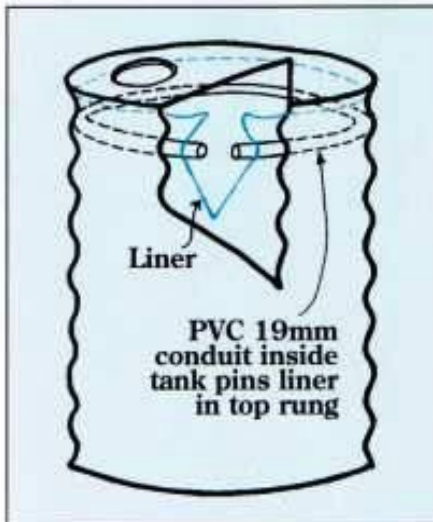

Steel tank with lid.



Steel tank without lid.

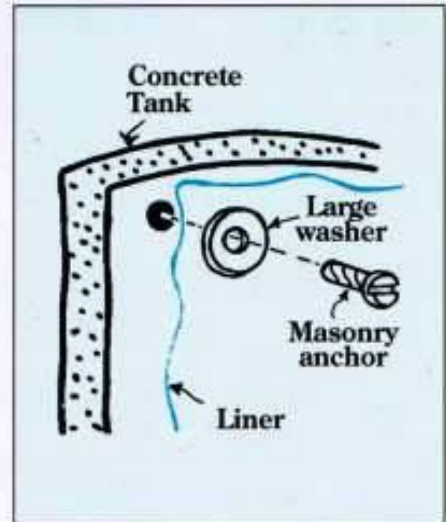


Concrete tank.


Custom made to suit your tank, the life span of the liner is indefinite if installed correctly. Ensure the inside of the tank is clean and free of sharp protruding objects. A cushion of sand, hessian bags or a thick layer of newspaper on the floor of the tank can be an advantage to avoid puncturing.

Allow plenty of slack in the liner wall height, so the rising water level may fill the liner around the corrugations. Care should be taken when working inside the liner - for example, remove your shoes. Keep in mind that all liners are made oversize to avoid any tension on welded seams, so spread the liner out evenly when installing.


Methods of fixing outlets.

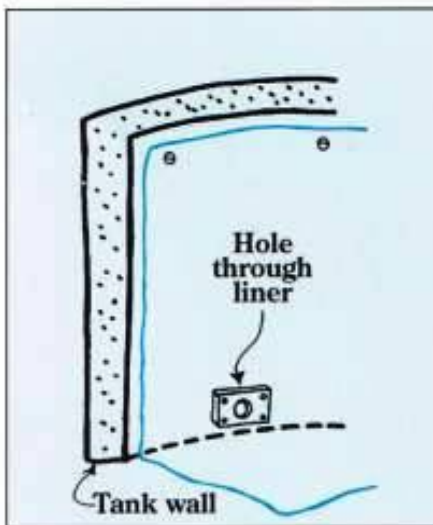

1. Aluminium plate is fastened through the liner. Use silicone between the wall, liner and plate. Cut a hole through the liner after the plate is positioned.

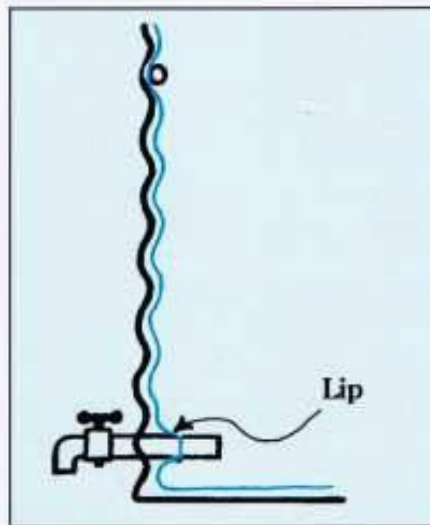

2. Cut a small hole in the liner. Position the hole over the pipe and slowly stretch the liner over the pipe. The stretched liner will produce a lip over the pipe which can be bound with tape.

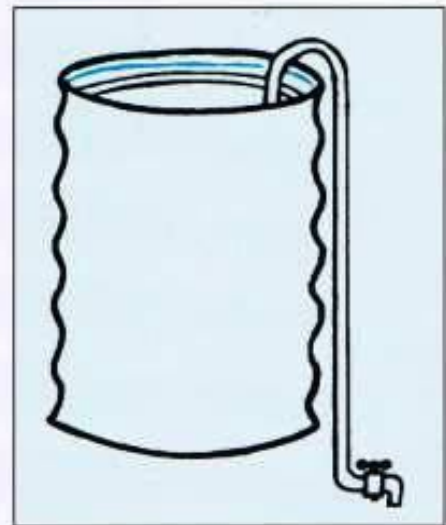

3. A PVC siphon may be used instead of piercing the liner.

GEOFF MILLER
 PROPRIETARY LIMITED

ACN 004 575 964

10-12 George Street, Sandringham, Victoria 3191, Australia
 Phone (03) 9597 0777. Fax (03) 9598 1638
 Custom fabricators of Poly Sheeting and Poly Fabrics
 for Agriculture, Horticulture, Industry & Home.